




Composite Vibration Damping and Absorbing Pad

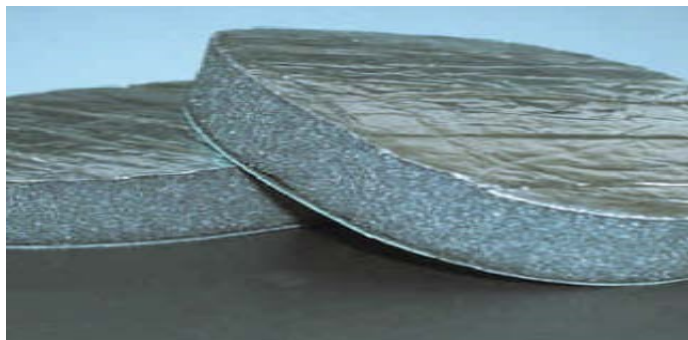

Sorberdamp™ is an adhesive-backed composite pad, combining the benefits of a vibration damper and a noise absorber. It is designed to reduce resonant vibration and airborne sound within light gauge metal, timber and plastic structures of less than 3mm thickness.

Sorberdamp's multilayered construction comprises a damping material, laminated to a foil faced, high performance noise absorbing polyurethane foam, - **Sorberfoam™**. The standard foil facing - **AGC**, is a flame retardant aluminium glass cloth with fire retardant adhesive, complying with the highest rating to British fire standard and IMO Marine standard. The product has a high tack, peel and stick, pressure sensitive adhesive applied to the damping layer contact surface.

Being lightweight and flexible, **Sorberdamp** readily conforms to irregular surfaces and finds popular use in light-gauge panel components in automotive vehicles, boats, buses and trains. It works effectively in enclosed spaces such as engine bays, air-conditioning ducts and generators.

The damping layer controls the ringing noise from components under their operating cycle by dissipating the vibration energy within the structure. This inhibits build-up of resonant vibrations, considerably reducing radiated noise. The foam layer exhibits impressive performance in absorbing any air-borne noise generated in such enclosures.

The **AGC** covering, enhances the fire and thermal insulation performance of the product and tunes the foam to enhance noise absorption in the mid to low frequency range, besides providing additional protection to the foam from mechanical damage and dirt, oil and liquid ingress.

FEATURES

- Dual benefits - vibration damping and noise absorption
- Flame retardant aluminium glass cloth covering - with highest fire ratings - Class 'O' to British standards.
- Ideal for lightweight panels and steel substrates of less than 3mm thickness
- No ozone-depleting substances are generated during manufacture
- Free from lead, odour-producing oils and bitumen
- Performance across a broad temperature range
- Lightweight, only 75% surface coverage is required to obtain maximum damping performance
- Easy to cut
- Easy installation with high-tack peel and stick adhesive backing
- Resistant to weather and UV light
- Can be constructed with other surface coverings
- Available in other thicknesses 6 to 50mm and compositions with other absorber materials including, fibreglass, melamine or polyester fibre
- Choice of three high performance self-adhesive tapes for easy installation (Refer document 'PSA Tapes - 525IP' under 'Accessories' on our website www.pyroteknc.com)
- Available with matching **AGC** tape to seal joints.

APPLICATIONS

- Automotive floors, firewalls, doors, ceiling and boot panels
- Marine vessels: bulkheads, deckheads, hull construction and ventilation
- Generators, compressor covers and machine housing guards
- Metal air-conditioning ducts and compressor housings
- Laundry and garbage chutes, hoppers, lids and bins
- White goods and under sink bowls

PRODUCT SPECIFICATIONS

TOTAL THICKNESS (mm)	SHEET SIZES (mm)	WEIGHT (Kg/m ²)	PEEL STRENGTH (180°/ Stainless Steel) (N/25mm) AFERA 4001	OPERATING TEMPERATURE RANGE (°C)
25	1000 X 1300	3	>24	-10 to 100 (Continuous) -10 to 120 (Intermittent)

Tolerances: Length: -0/+50mm; Width: -0/+5mm; Thickness: +/- 0.5mm; Weight: -0/+10%.

ACOUSTIC PERFORMANCE

Report Number: 27313AR

INCREASE IN DECAY RATE (dB/Sec) ON 1MM SUBSTRATE	
Steel	61%
Aluminium	77%


FLAMMABILITY PROPERTIES OF FOAM WITH AGC FACING

TEST METHOD	INDEX	RESULTS	DESCRIPTION
ISO 4589.2 & 3— 1996 (Report No. 328271/2)	Limiting Ambient Oxygen Index (LOI)	22.6% 21.3%	Determination of the burning behaviour of plastics by oxygen index at ambient and elevated temperature of 60°C.
EN ISO 9094-1:2003 (Report No. 328272(A)) Summary Report	Classification/Compliance	Complies	Complies to Directive 94/25/EC. Material suitable for use as insulation of engine space in recreational maritime craft.
UL94* (Report No. 13513JY7)	After flame time ≤ 2 seconds	HF-1**	Horizontal burn test for foam materials. Complies
FMVSS-302* (Report No. 14713JY1)	Burn Rate - mm/min	Self Extinguishing	Automotive burn rate test. Complies

*For plain foam only
**Result applies to 12mm thickness.

ACOUSTIC PERFORMANCE OF FACED FOAM

(Tested ISO 354-2003 at Canterbury University , New Zealand—Report Numbers 278,279,280)

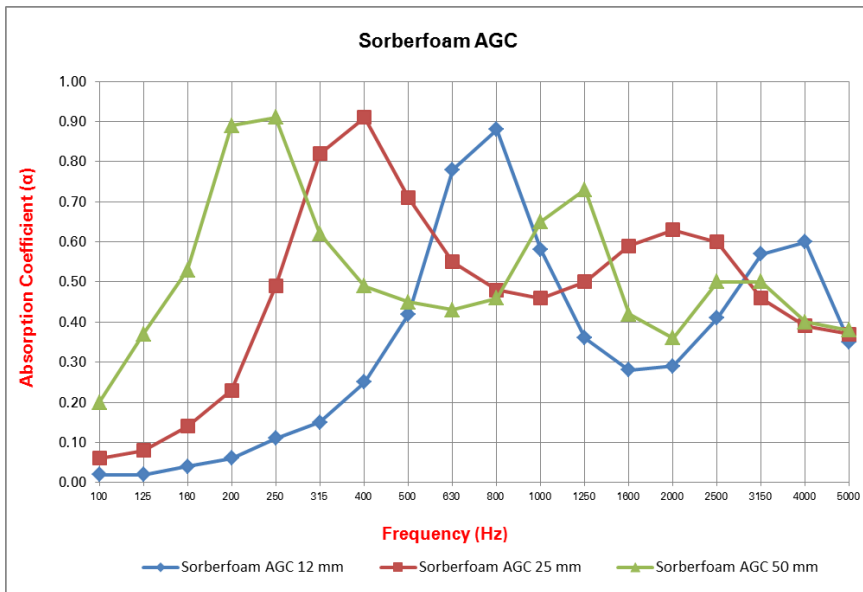

Frequency (Hz)	Sorberfoam AGC 12 mm	Sorberfoam AGC 25 mm	Sorberfoam AGC 50 mm
100	0.02	0.06	0.20
125	0.02	0.08	0.37
160	0.04	0.14	0.53
200	0.06	0.23	0.89
250	0.11	0.49	0.91
315	0.15	0.82	0.62
400	0.25	0.91	0.49
500	0.42	0.71	0.45
630	0.78	0.55	0.43
800	0.88	0.48	0.46
1000	0.58	0.46	0.65
1250	0.36	0.50	0.73
1600	0.28	0.59	0.42
2000	0.29	0.63	0.36
2500	0.41	0.60	0.50
3150	0.57	0.46	0.50
4000	0.60	0.39	0.40
5000	0.35	0.37	0.38
α_w	0.35	0.55	0.50 (L)
NRC	0.35	0.55	0.60



The Silencer
0468 356 600
info@thesilencer.com.au
www.thesilencer.com.au

CONTACT DETAILS:
for further information and contact details,
please visit our website at www.pyroteknc.com

Sorberdamp

Caveats: Specifications are subject to change without notice. The data in this document are typical of average values based on tests by independent laboratories or by the manufacturer and are indicative only. Materials must be tested under intended service conditions to determine their suitability for purpose. The conclusions drawn from acoustic test results are as interpreted by qualified independent testing authorities. Nothing here releases the purchaser/user from responsibility to determine the suitability of the product for their project needs. Always seek the opinion of your acoustic or mechanical engineer on data presented by the manufacturer. Due to the wide variety of individual projects, Pyrotek NC is not responsible for differing outcomes from using their products. Pyrotek disclaims any liability for damages or consequential loss as a result of reliance solely on the information presented. No warranty is made that the use of this information or of the products, processes or equipment to which this Information Page refers will not infringe any third party's patents or rights. **DISCLAIMER:** This document is covered by Pyrotek standard Disclaimer, Warranty and © Copyright clauses. See www.pyroteknc.com/disclaimer.